



OSSPF-1


Application

Connecting Patch for Over Panel & Side Panel

Specifications

Over Panel & Side Panel Patch

- With pivot pin 10 mm diameter to suit OSSPF-2
- Interchangeable patch faces to keep bolt head on same side
- Adjustable pivot point of 55/65 mm.
- Stainless Steel Grade 304

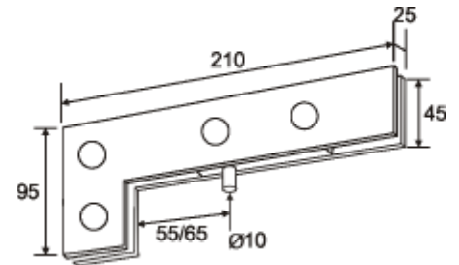

OSSPF-2


Application

To Accept the Pivot Pin of OSSPF-1 or OSSPF-GDP.

Specifications

Top Patch

- Pivot hole diameter 10 mm.
- Adjustable pivot point of 55/65 mm.
- Interchangeable patch faces to keep bolt head on same side
- Stainless Steel Grade 304

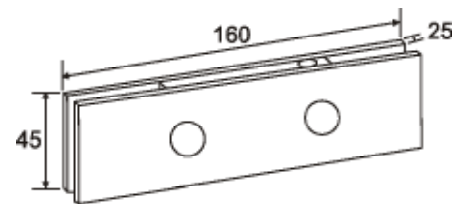

OSSPF-3



Application

To accept Ozone Floor Springs or any Floor Spring Bottom Patch Fitting

Specifications

Bottom Patch

- Adjustable pivot point 55/65 mm
- Interchangeable patch faces to keep bolt head on same side
- Stainless Steel Grade 304

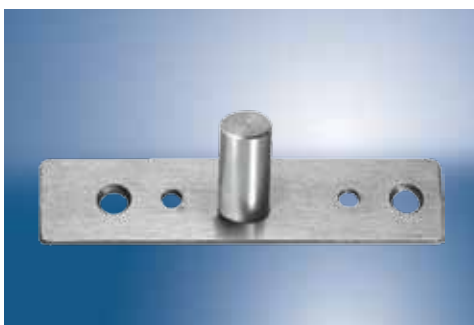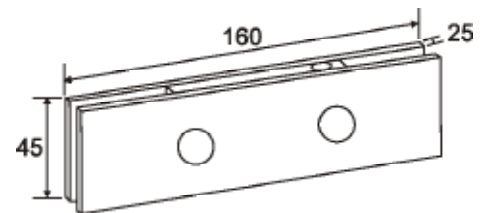

OSSPF-GDP


Application

Top Pivot Pin for Top Patch

Specifications

Stainless Steel Pivot

- Top pivot with 10 mm diameter pin
- Wear resistant SS 304 pivot pin
- Pivot held in overhead structure

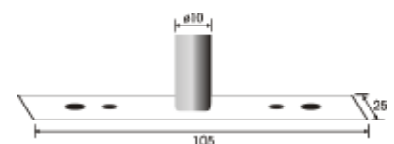

STAINLESS STEEL PATCH FITTINGS



GLASSAGE
SERIES



OSSPF-4


Application

For Mounting to Over Panel & Attached with Wall.

Specifications

Over Panel Patch For Wall Mounting

- Adjustable pivot point 55/65 mm
- With pivot pin 10 mm diameter
- Interchangeable patch faces to keep bolt head on same side
- Stainless Steel Grade 304

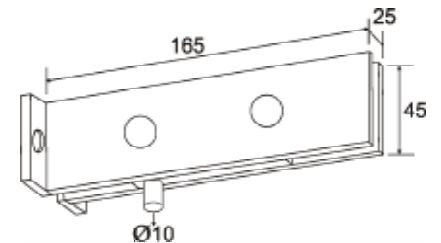

OSSPF-51


Application

To Hold Back to Back Door Pivot Pins.
Installed on Over Panel with Fin

Specifications

Over Panel Patch For Back To Back Doors

- With pivot pins of 10 mm diameter
- Adjustable pivot point 55/65 mm.
- Stainless Steel Grade 304

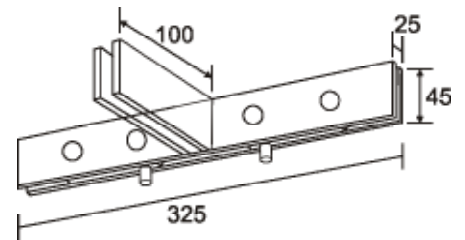

OSSPF-41 L


Application

To Hold Over Panel and Side Panel
with Left Handed Fin

Specifications

Over Panel Side Panel Connector With Fin

- To hold left handed fin
- With pivot pin of 10 mm diameter
- Adjustable pivot point 55/65 mm.
- Stainless Steel Grade 304

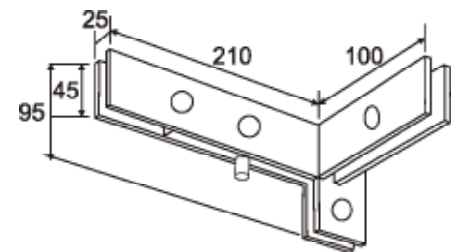

OSSPF-41 R


Application

To Hold Over Panel and Side Panel
with Right Handed Fin

Specifications

Over Panel Side Panel Connector With Fin

- To hold right handed fin
- With pivot pin of 10 mm diameter
- Adjustable pivot point 55/65 mm.
- Stainless Steel Grade 304

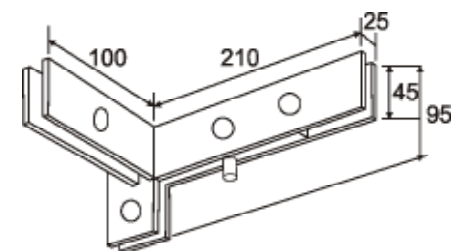

OSSPL-1

Application

To Lock the Glass Door with Patch Fittings

Specifications

Stainless Steel Patch Lock

- Reversible lock
- Provided with euro profile cylinder
- Perfect combination when used with stainless steel patch fittings
- Stainless Steel Grade 304

